

LIGHT SOURCE 125

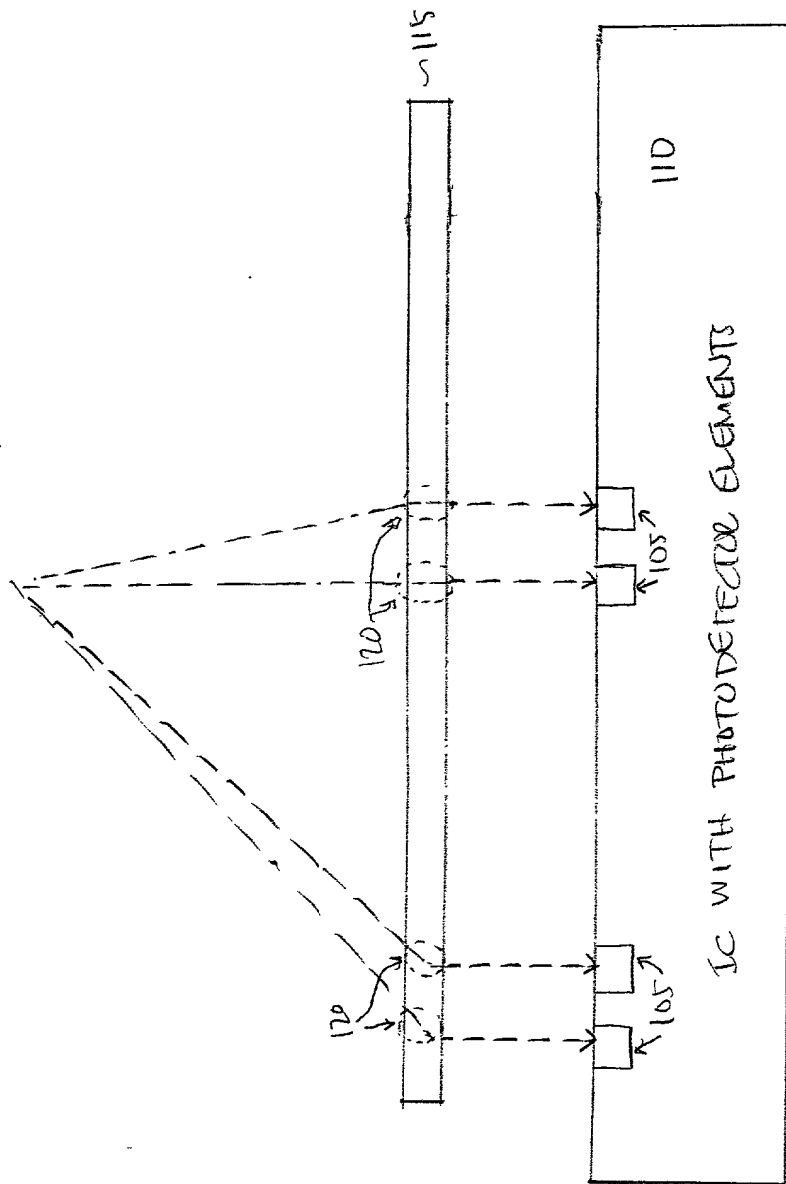


FIGURE 1

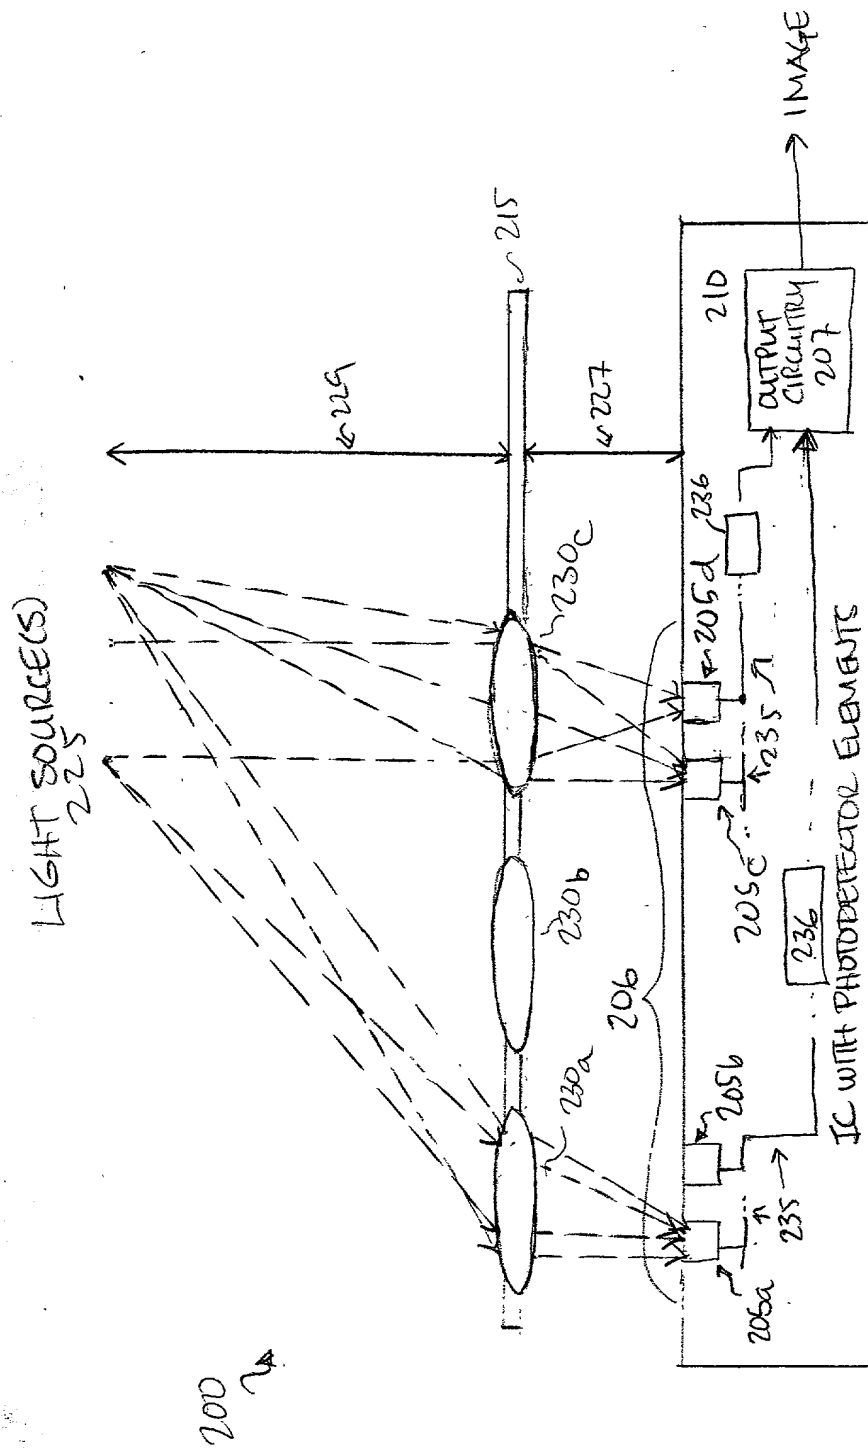


Figure 2

Year	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

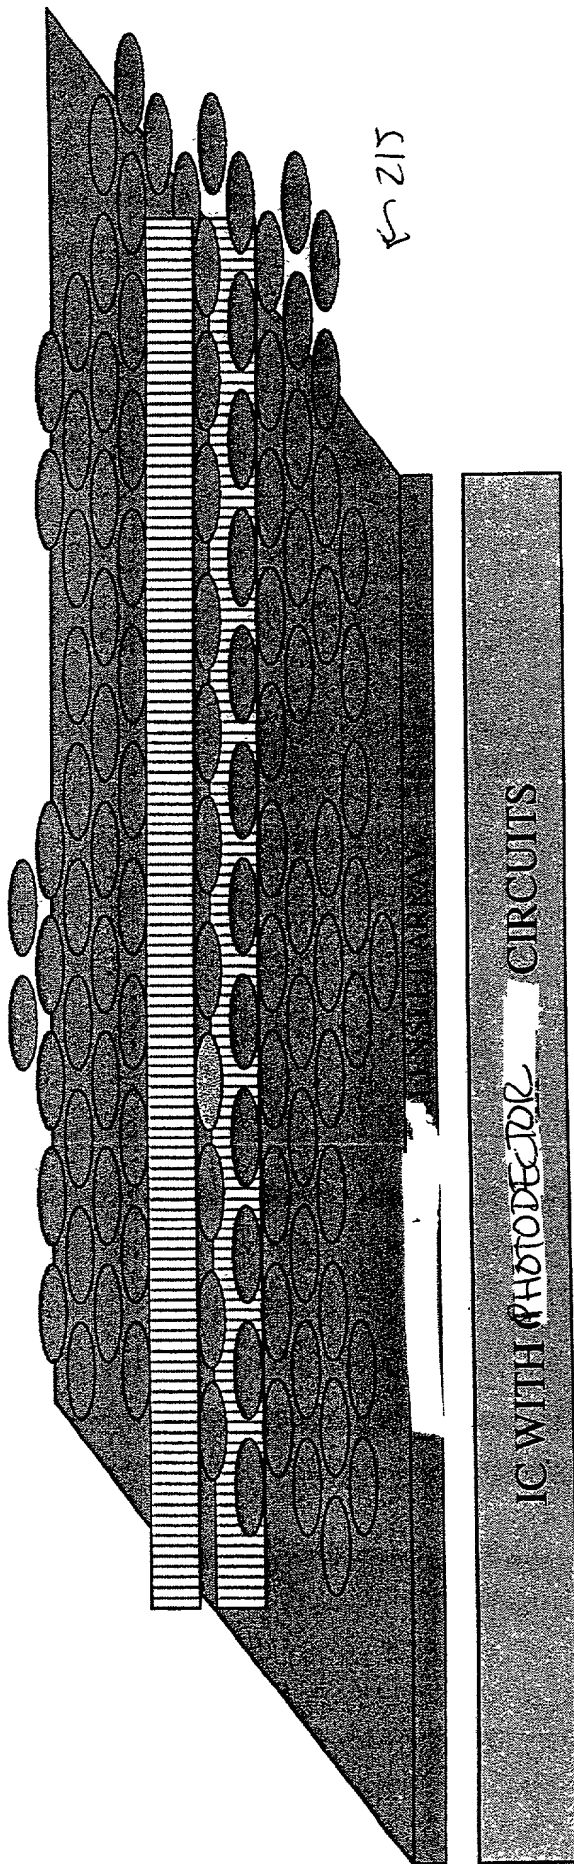


FIGURE 3

- LIGHT SOURCE(S)
415

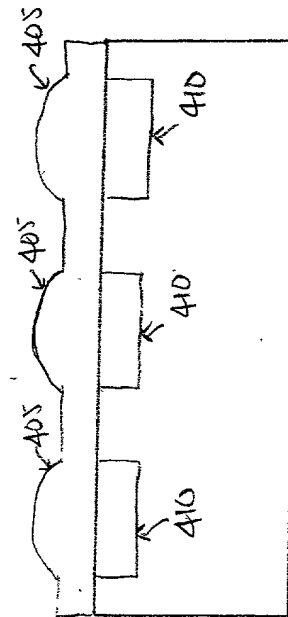



FIGURE 4
(PRIOR ART)

LIGHT SOURCE(S) 625

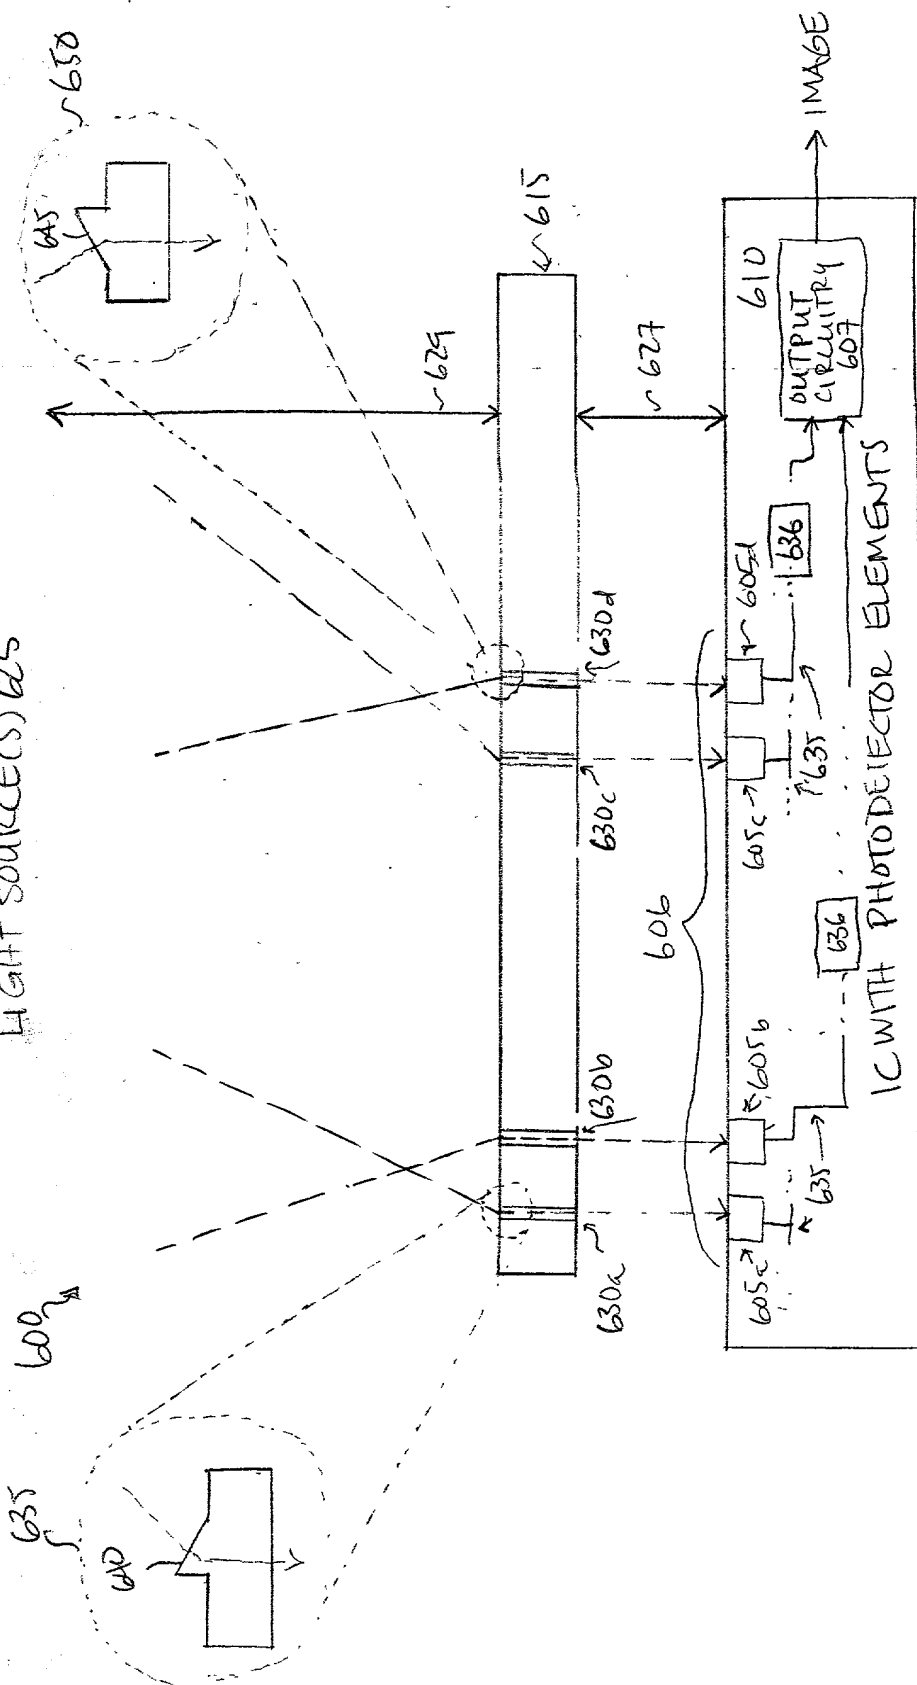


FIGURE 6

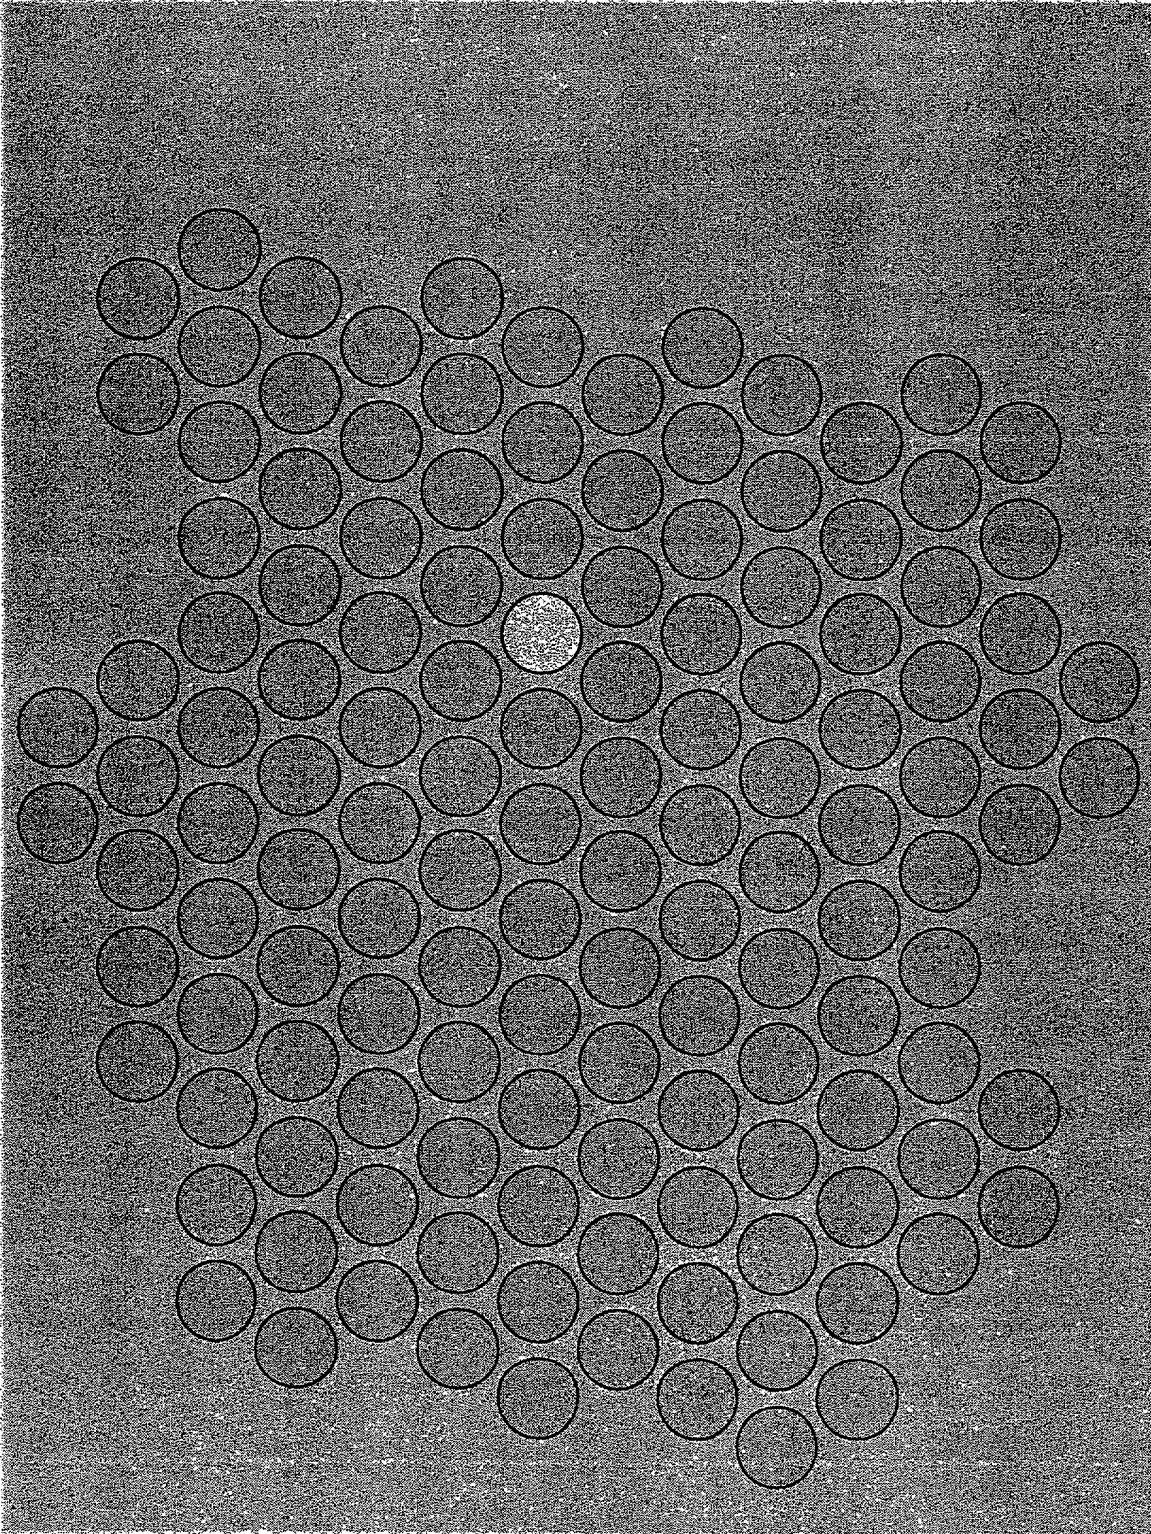


Figure 7

Figure 8 is a schematic diagram of a waveguide structure. The waveguide 630 is formed by a high refractive index region 805 and a low refractive index region 810. The waveguide 630 is surrounded by a cladding layer 815. The waveguide 630 is formed by a series of rings 810. The waveguide 630 is formed by a series of rings 810. The waveguide 630 is formed by a series of rings 810.

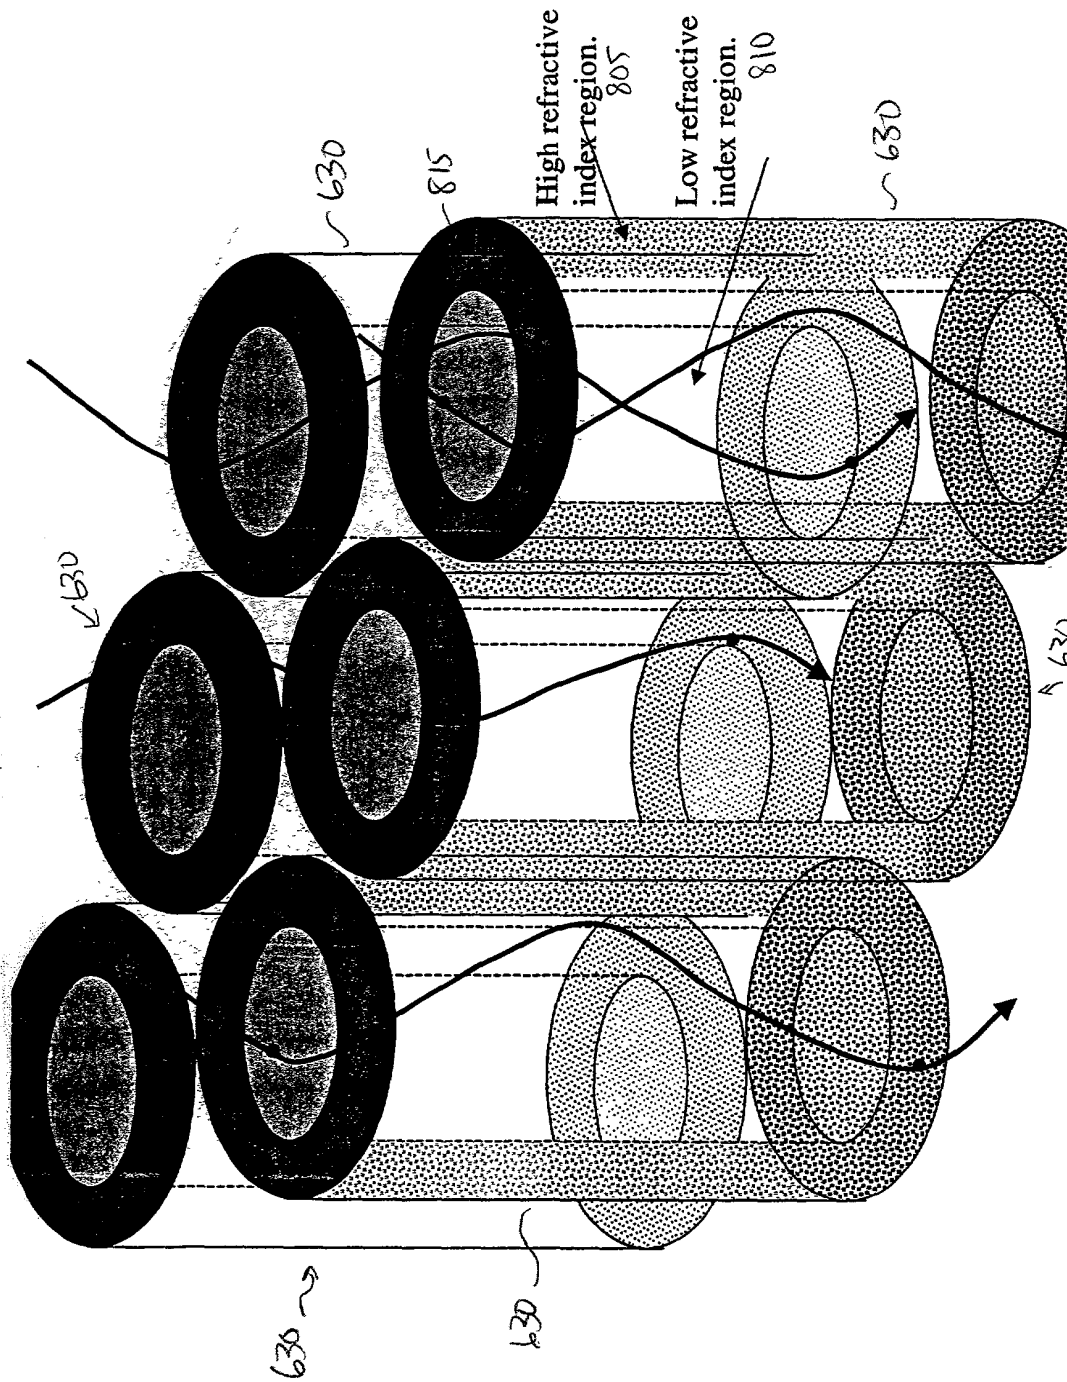


Figure 8

FIG. 9 is a block diagram of a system 900 for processing light sources 925. The system 900 includes a light source 925, a light detector 930, a microcontroller 910, a microcontroller control circuitry 912, an image processing circuitry 906, and an output circuitry 907. The light source 925 is connected to the light detector 930. The light detector 930 is connected to the microcontroller 910. The microcontroller 910 is connected to the microcontroller control circuitry 912. The microcontroller control circuitry 912 is connected to the image processing circuitry 906. The image processing circuitry 906 is connected to the output circuitry 907. The output circuitry 907 is connected to an image output.

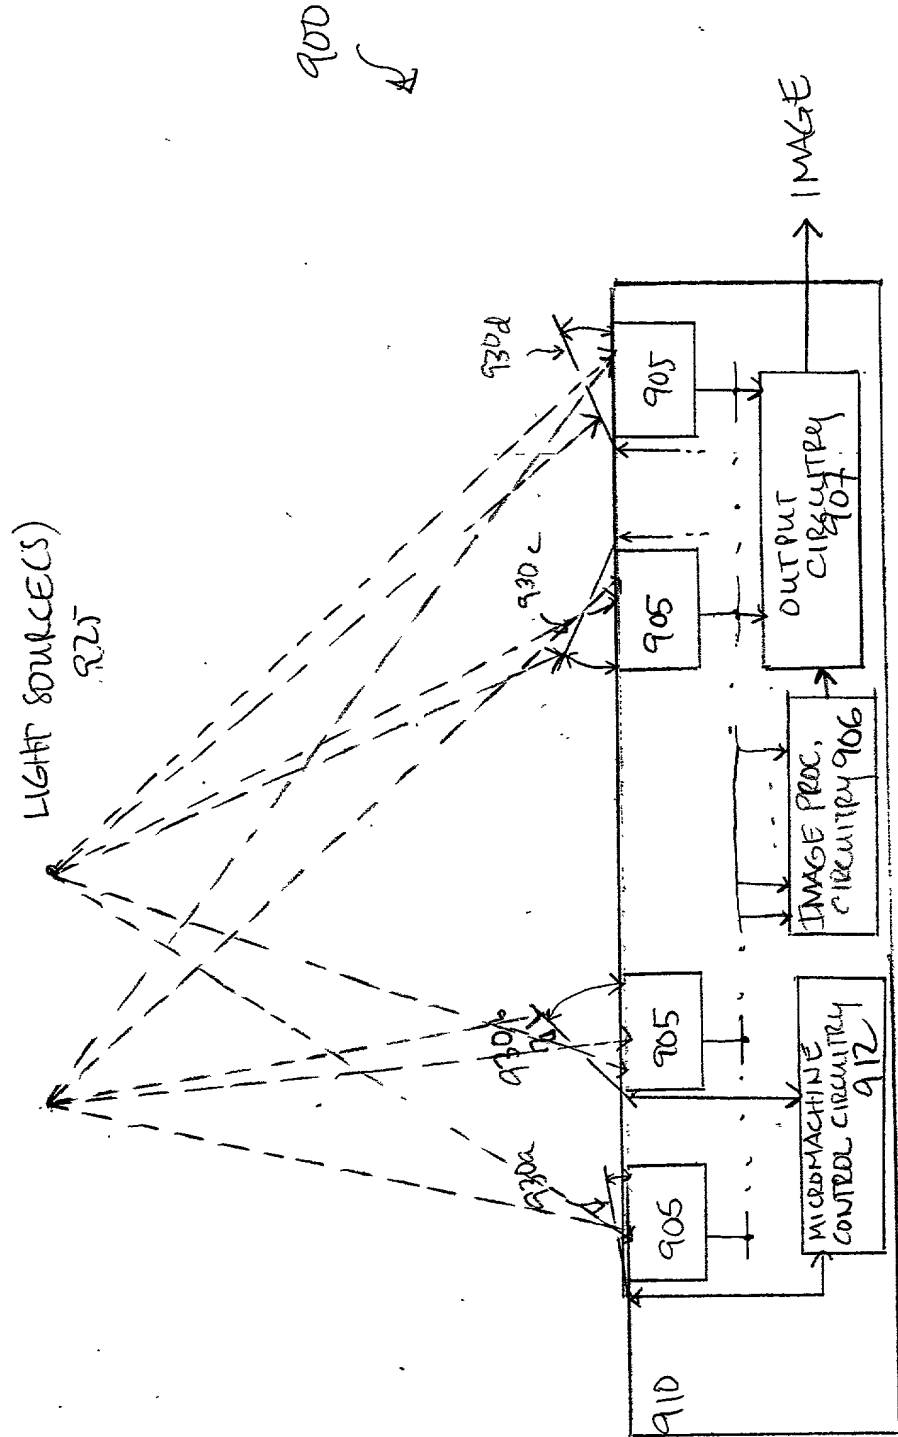


FIGURE 9

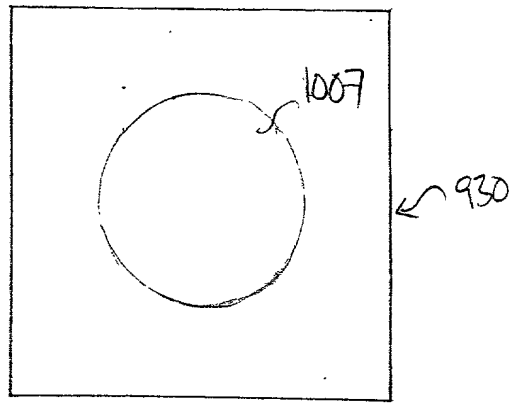


FIGURE 10

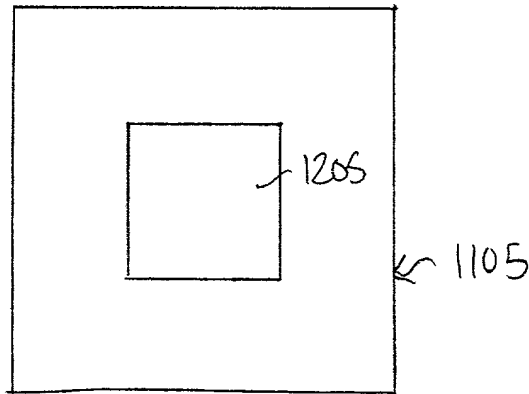


FIGURE 12

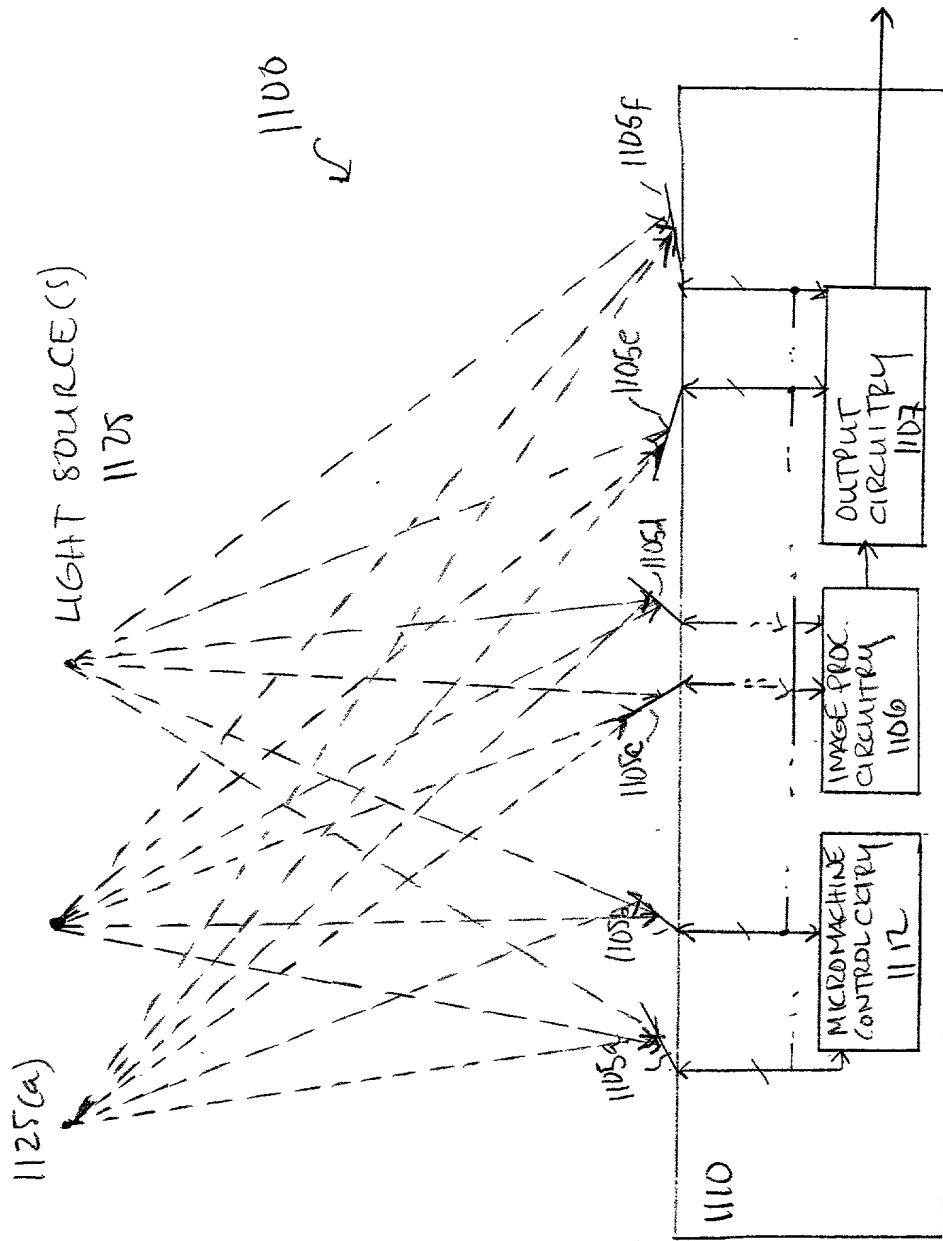


FIGURE 11

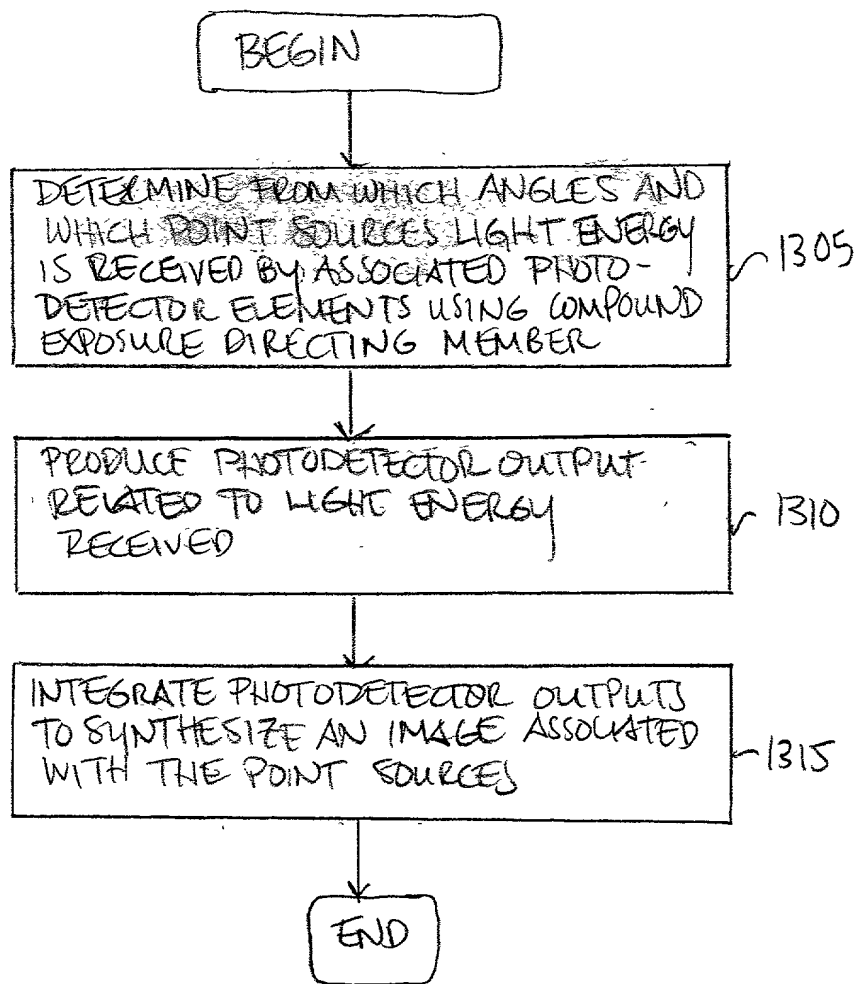


FIGURE 13